

MODEL EK 92 GA

92"


SMARTBOARD

Imaginez, Créez, Développez, et Formez
en toute simplicité



ACCENT

Dimension

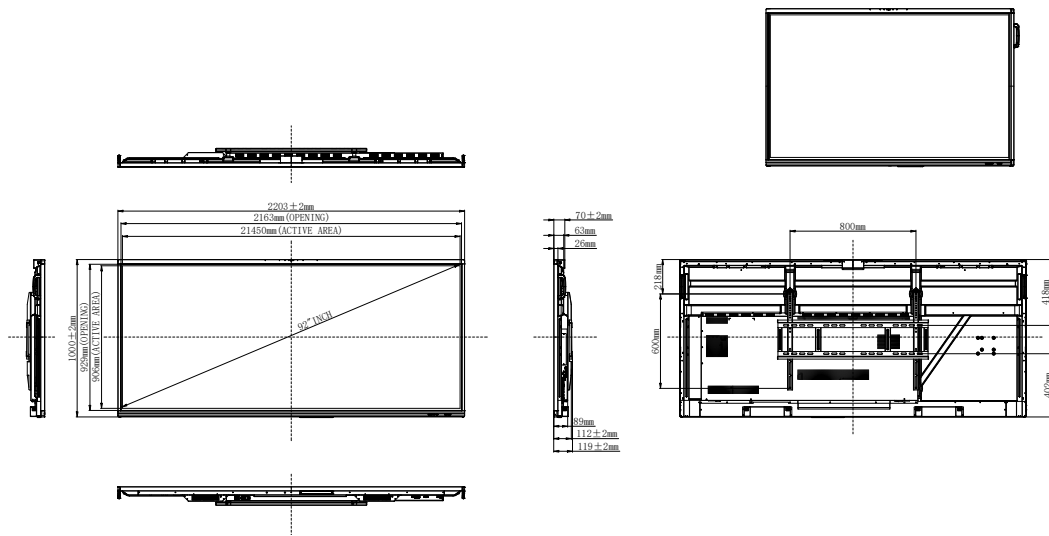

Specification

Toughened Glass with Level 7

IR (Infrared Ray) touch technology



Front power key, 1

Front 2 USB3.0 ports

Display

Size	92
Screen Type	LCD
Aspect Ratio	21:9
Display Area	2141.952(H)x903.636(V)
Resolution	5120(H)*2160(V)
Pixel Pitch (Sub Pixel)	0.1595 (H) x 0.4785 (V)
Back Light Type	D-LED
Response Time	6ms(Typ)
Refreshing Frequency	60Hz
Display Color	1.07B(8 bits + FRC)
Brightness with glass (typ)	450 cd/m2
Brightness with glass (min)	400 cd/m2
Contrast Ratio (typ)	4000:1
Panel Surface	High Haze 25%
Viewing Angle	178°
Backlight Life Time	≥60000 Hours
Display Orientation(Landscape & Portrait)	Landscape
Operation Time	7 daysx16 hours

Audio

MIC	8*Array, Pickup Distance0-8M
Speaker Type	Built-in Speaker
Speaker Physical Power	2 x 20W+20W

Power

Power Requirements	100-240V~50/60Hz 8.0A
Typical Power*[1]	
Max Power*[2] (W/OPS)	
Standby Power	≤0.5W

Operating System

System Version	Android 13
RAM	8G
ROM	64G
CPU	A55x4
GPU	Mali G610MP4

Touch System

Sensing Type	Infrared touch technology
Touch Tool	Finger, Passive pen,Opaque objects
Accuracy	±1mm
Touch Point	50 points touch
Minimum object size	/
Writing Height	≤2mm
Response Time	≤5ms
System	Windows11/Windows10 Windows8/Windows7 WindowsXP/Android Linux/Mac/OS X/Chrome

Accessories

Power Cord	×3
HDMI Cable	×3
USB Touch Cable (TypeA-B)×3	
Remote Control	×1
Writing Pen	×2

Physical Specifications

Key Location & Number	Front power key, 1
Dimension (L*H*D)	TBD
Dimension(package) L*W*H	TBD
Net Weight	TBD
Gross Weight	TBD
Thickness (W/ wall mount)	TBD
Wall-hanging Screw Spec	M8x25mm
VESA	800*600mm
Handle	2

Environmental Conditions

Operation Temperature	0°C~40°C
Operation Humidity	10%~90%RH
Storage Temperature	-20°C~60°C
Storage Humidity	10%~90%RH
Altitude	Below 5000 meters

I/O Port

HDMI IN	4(HDMI2.1*1+HDMI2.0*3)
HDMI OUT	1, 4K out
DP IN	1
SPDIF	Optical*1
Audio Out	1,3.5mm Type
Audio in	1,3.5mm Type
USB 2.0	*1 Only for software update
USB 3.0	2(Top)+2(Front)+2(Side)
TOUCH 2.0	3
RS232	1
LAN(RJ45)	2(IN/OUT)
USB Type-C	"2 (Front*1+Rear*1) Rear : PD100W*,Front : PD15W

other information

Size and weight vary by configuration and manufacturing process, please refer to the actual product.
The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product.
The description, illustrations, etc.
in this document may subject to change in accordance with the latest product specification and performance. Should the above-mentioned change in the document become necessary, the document may be updated without written notice.

Notes:

*[1]: Without OPS, after the user menu is restored to the factory setting, it starts up without any setting and the port is not loaded.

*[2]: With OPS, OPS plays the color bar signal and runs the burning test. Port full load, user menu: Volume 100%, backlight 100%, brightness contrast 100%.

www.accent.ma

Lot 25 Zone Industrielle, 28810 Mohammedia Maroc (+212) 5 23 30 30 27
contact@dbm.ma